




DOCUMENTATION SHEET

Rubber Bellows

Type 1S Yellow

1S YELLOW



General

Our rubber bellows yellow ring are made from a nitrile rubber compound (ECO) and provide resistance to water upto 70°C and oil upto 90°C, however this is influenced by the working pressure.

Rubber bellows with flanges have a special flow-assisting convoluted shape of the bellows which minimize detrimental turbulence of the medium and pressure loss.


High tensile strength texture cord plies combined with proven synthetic rubber mixes guarantee maximum reliability and an extended working life.

The rubber bellows are produced with a vulcanized steel ring to guarantee a perfect sealing of the profiled sealing rings in the special chamber of the swivel flanges.

Average installed insulation is about 25 dB, a figure which is further improved by compressed installation.

The standard flange range is made of carbon steel S235JR, drilled according to DIN PN10/16 and electrolytic galvanized.

Maximum temperature water: +70°C
Maximum temperature oil: +90°C

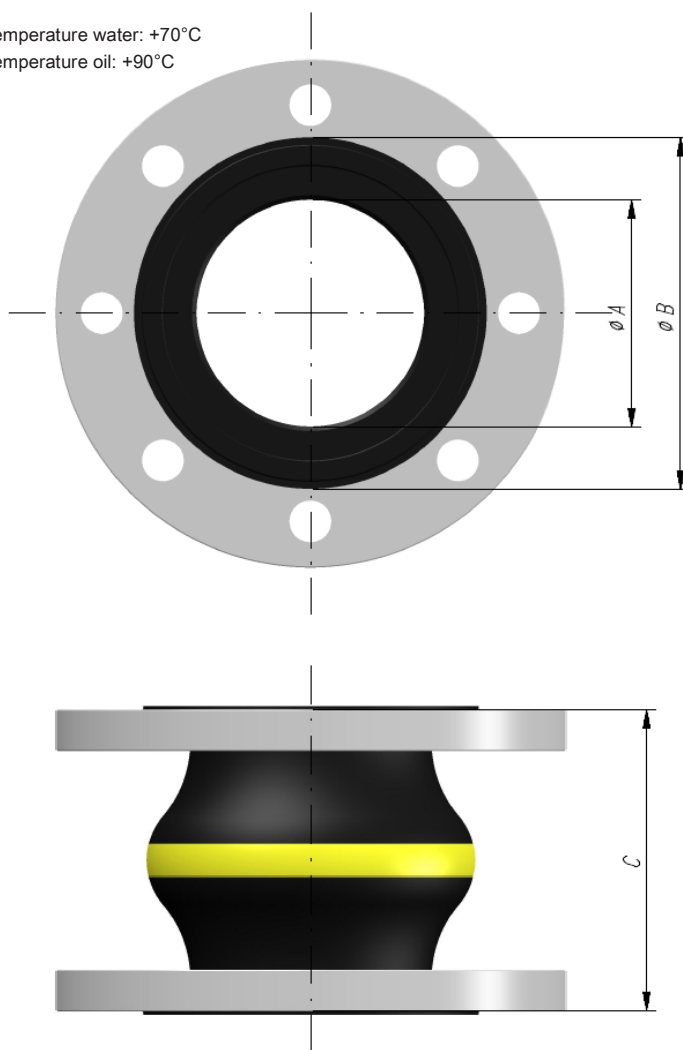

DIMENSIONS



Rubber bellows with flanges have a special flow-assisting convoluted shape of the bellows which minimize detrimental turbulence of the medium and pressure loss. High tensile strength aramide cord plies combined with proven synthetic rubber mixes guarantee maximum reliability and an extended working life.

The rubber bellows are produced with a vulcanized steel ring to guarantee a perfect sealing of the profiled sealing rings in the special chamber of the swivel flanges. Average installed insulation is about 25 dB, a figure which is further improved by compressed installation.

The standard flange range is made of carbon steel S235JR, drilled according to DIN PN10/16 and electrolytic galvanized.

1S YELLOW RING	Bellows dimensions			Allowable Displacement			Effective bellows area cm ²	Weight kg	Min. Pressure (abs)		Max. Installation length	
	ØA	ØB	C	Ax.	Lat.	Ang.			kPa	MPa	min.	max.
	mm	mm	mm	mm	mm	°					mm	mm
KR032G110S000	32	64	160	-30/+30	±30	10	15	3,6	20	1,6	150	170
KR040G110S000	40	72	160	-30/+30	±30	10	20	4,2	20	1,6	150	170
KR050G110S000	50	84	160	-30/+30	±30	10	30	4,8	20	1,6	150	170
KR065G110S000	65	104	160	-30/+30	±30	10	50	5,5	30	1,6	150	170
KR080G110S000	80	114	160	-30/+30	±30	10	85	7,1	40	1,6	150	170
KR100G110S000	100	136	160	-30/+30	±30	10	125	8,2	60	1,6	150	170
KR125G110S000	125	154	160	-30/+30	±30	10	185	10,2	70	1,6	150	170
KR150G110S000	150	190	160	-30/+30	±30	10	250	12,5	70	1,6	150	170
KR200G110S000	200	250	160	-30/+30	±30	10	400	16,7	70	1,6	150	170

TABLE

Standard flange S235JR, drilled according to DIN PN10/16, electrolytic galvanized.

Pressure

The maximum working pressure is 16 Bar (10 Bar*) with a test pressure of 25 Bar and even a burst pressure of over 60 Bar (30 Bar*)

(* for bellows larger than NB 150)



TYPE APPROVALS

Rubber Design B.V.

Industrieweg 21
2995BE Heerjansdam
The Netherlands
Phone: +31 (0) 78 677 87 78
Fax: +31 (0) 78 677 10 38
Email: info@rubberdesign.nl
Web: www.rubberdesign.nl

1S YELLOW