




DOCUMENTATION SHEET

Rubber Bellows

Type 3K Red

3K RED



General

Our rubber bellows are made from various elastomers and provide the flexible element in pipe work that is indispensable in today's technically advanced plant and machinery spaces.

By using the best quality proven rubber compounds and a construction based on many years of experience, our rubber bellows are produced to a high quality standard to guarantee maximum safety and performance.



Rubber bellows are used in various fields of industry like shipbuilding, offshore, dredging, power plants, chemical industry, water works etc.

The rubber bellows provide:

- Compensation of thermal or mechanical movement of pipe work in axial, lateral and/or angular directions.
- Absorption and isolation of vibration combined with damping of pipe work borne sound transmission.
- Reduction of pressure pulses in pipe work.
- Compensation for pipe work misalignment on flexibly mounted installations.

Our program consists of rubber bellows with flanges, according all known standards as well as special connections, and rubber and silicone bellows for installation with hose clamps.

Maximum temperature: +120°C

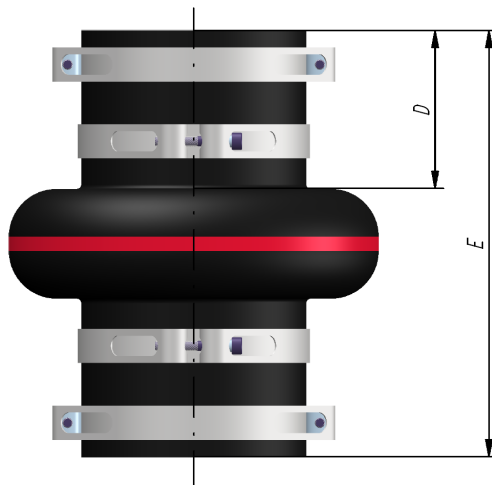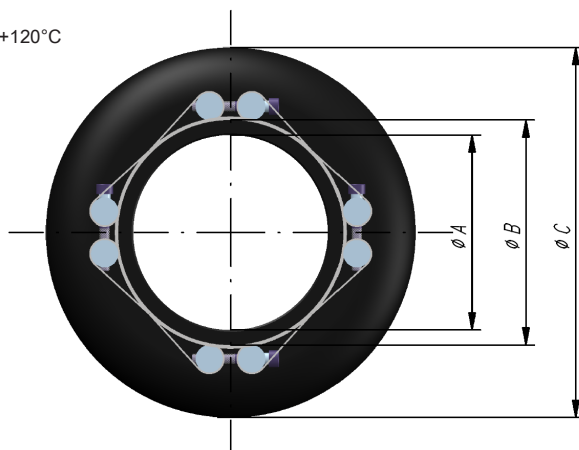

DIMENSIONS



Rubber Design

vibration and noise control

As an addition to the flanged bellow range our 3K and 3K2 rubber bellows have been designed especially to provide small, low weight bellows which are both very flexible and simple to install.

The 3K ranges accommodate misalignment, axial and lateral pipe work movements and dramatically reduce the transmission of noise, vibration and shock.

High tensile strength aramide cord plies combined with proven synthetic rubber mixes guarantee maximum reliability and an extended working life.

The burst pressure safety factor is 5 times the working pressure of 4 Bar. The minimum work pressure is 70 kPa (abs) and can be lowered by fitting a vacuum support ring. Average installed insulation is about 25 dB, a figure which is further improved by compressed installation.

3K RED RING	Bellows dimensions					Allowable Displacement			Weight	Min.	Max.	Advised
										Pressure		Hose
										(abs)		clamp
	ØA	ØB	C	D	E	Ax.	Lat.	Ang.				
Art.nr without clamps	mm	mm	mm	mm	mm	mm	mm	°	kg	kPa	MPa	
KV025.0K1000	25,0	44	82	44	140	-15/+7	+/-10	7	0,8	70	0,4	30-40
KV026.9K1000	26.9	45	84	44	140	-15/+7	+/-10	7	0,8	70	0,4	36-45
KV030.0K1000	30.0	48	87	44	140	-15/+7	+/-11	7	0,8	70	0,4	40-50
KV032.0K1000	32,0	50	95	44	140	-15/+7	+/-11	7	0,8	70	0,4	40-50
KV033.7K1000	33,7	52	97	44	140	-15/+7	+/-12	7	0,9	70	0,4	45-55
KV038.0K1000	38,0	57	108	44	140	-15/+7	+/-12	7	0,9	70	0,4	50-60
KV040.0K1000	40.0	59	111	52	160	-19/+9	+/-14	7	0,9	70	0,4	50-60
KV042.4K1000	42,4	61	115	52	160	-19/+9	+/-14	7	0,9	70	0,4	55-65
KV044.5K1000	44,5	63	117	52	160	-19/+9	+/-14	7	0,9	70	0,4	55-65
KV048.3K1000	48,3	67	121	52	160	-19/+9	+/-14	7	0,9	70	0,4	60-70
KV050.8K1000	50.8	69	124	52	160	-19/+9	+/-14	7	1,0	70	0,4	60-70
KV054.0K1000	54,0	73	137	52	160	-19/+9	+/-14	7	1,0	70	0,4	65-75
KV057.0K1000	57,0	76	140	52	160	-19/+9	+/-14	7	1,2	70	0,4	70-80
KV060.3K1000	60,3	78	142	62	180	-19/+9	+/-14	7	1,3	70	0,4	70-80
KV063.5K1000	63,5	81	145	62	180	-19/+9	+/-14	7	1,3	70	0,4	75-85
KV076.1K1000	76,1	94	158	62	180	-19/+9	+/-14	7	1,4	70	0,4	85-95
KV088.9K1000	88,9	107	171	85	225	-20/+10	+/-15	7	1,7	70	0,4	100-110
KV101.6K1000	101.6	121	195	90	250	-25/+12	+/-16	7	2,1	70	0,4	115-125
KV108.0K1000	108,0	128	212	90	250	-25/+12	+/-16	7	2,5	70	0,4	120-130
KV114.3K1000	114,3	134	219	90	250	-25/+12	+/-16	7	2,5	70	0,4	125-135
KV115.8K1000	115,8	135	218	90	250	-25/+12	+/-16	7	2,5	70	0,4	130-140
KV127.0K1000	127,0	146	229	90	250	-25/+12	+/-16	7	2,6	70	0,4	130-140
KV133.0K1000	133,0	154	236	90	250	-25/+12	+/-16	7	2,7	70	0,4	145-155
KV139.7K1000	139,7	160	243	90	250	-25/+12	+/-16	7	2,9	70	0,4	155-165

TABLE

Remark

Rubber bellows reinforced with aramide cord.

Pressure

The maximum working pressures are guaranteed by using the recommended power clamps in steel (galvanized) or stainless steel according to the table.



TYPE APPROVAL

3K RED



Rubber Design B.V.

Industrieweg 21

2995BE Heerjansdam

The Netherlands

Phone: +31 (0) 78 677 87 78

Fax: +31 (0) 78 677 10 38

Email: info@rubberdesign.nl

Web: www.rubberdesign.nl