




DOCUMENTATION SHEET

Anti-vibration Mountings
Type Circular buffer TXB

TXB CIRCULAR BUFFER

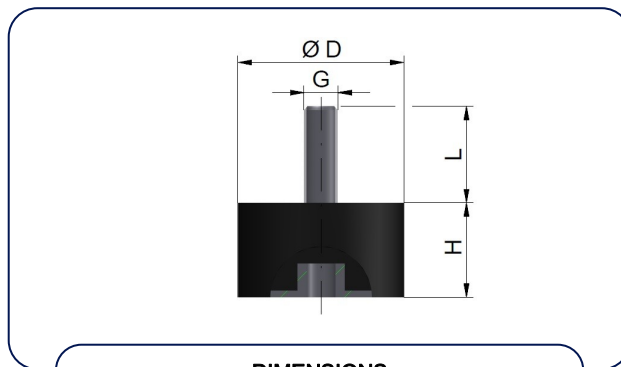

DIMENSIONS

Type	Dimensions (mm)				Stiffness (N/mm)		Max. load (N)		Stock
	D	H	G	L	Cz	Cxy	Fz	Fxy	
TXB010010S20A45	10	10	M4	12	60	5	70	6	
TXB010010S20A60	10	10	M4	12	75	9	75	10	s
TXB015015S20A45	15	15	M4	12	80	5	96	9	s
TXB015015S20A60	15	15	M4	12	100	9	120	15	s
TXB015020S20A45	15	20	M4	12	30	4	60	10	
TXB015020S20A60	15	20	M4	12	80	8	160	20	
TXB015030S20A45	15	30	M4	12	20	3	60	12	
TXB015030S20A60	15	30	M4	12	30	6	90	24	
TXB020015S20A45	20	15	M6	18	267	14	320	24	s
TXB020015S20A60	20	15	M6	18	325	25	390	43	
TXB020020S20A45	20	20	M6	18	100	8	200	20	s
TXB020020S20A60	20	20	M6	18	130	14	260	35	s
TXB020025S20A45	20	25	M6	18	55	10	120	50	s
TXB020025S20A60	20	25	M6	18	95	17	210	90	
TXB025020S20A45	25	20	M6	18	120	15	250	90	
TXB025020S20A60	25	20	M6	18	195	28	410	160	
TXB025030S20A45	25	30	M6	18	48	8	144	32	
TXB025030S20A60	25	30	M6	18	100	16	300	64	s
TXB025040S20A45	25	40	M6	18	28	4	98	16	
TXB025040S20A60	25	40	M6	18	55	10	192	40	s
TXB030015S20A45	30	15	M8	23	350	49	420	83	
TXB030015S20A60	30	15	M8	23	590	103	708	175	
TXB030020S20A45	30	20	M8	23	160	50	325	130	
TXB030020S20A60	30	20	M8	23	280	75	560	210	
TXB030030S20A45	30	30	M8	23	105	18	315	130	
TXB030030S20A60	30	30	M8	23	168	32	504	220	s
TXB040030S20A45	40	30	M8	23	150	35	450	200	
TXB040030S20A60	40	30	M8	23	273	70	820	330	s
TXB040040S20A45	40	40	M8	23	108	20	378	210	s
TXB040040S20A60	40	40	M8	23	189	39	660	350	s
TXB050030S20A45	50	30	M10	28	364	48	1090	192	
TXB050030S20A60	50	30	M10	28	545	94	1635	376	
TXB050040S20A45	50	40	M10	28	144	36	504	350	
TXB050040S20A60	50	40	M10	28	310	71	1116	740	s
TXB050050S20A45	50	50	M10	28	120	24	520	310	
TXB050050S20A60	50	50	M10	28	180	49	900	510	
TXB075040S20A45	75	40	M12	37	422	70	1477	420	s
TXB075040S20A60	75	40	M12	37	700	130	2450	780	s
TXB075050S20A45	75	50	M12	37	333	60	1665	620	
TXB075050S20A60	75	50	M12	37	520	100	2600	1100	
TXB075060S20A45	75	60	M12	37	209	39	1254	390	
TXB075060S20A60	75	60	M12	37	303	76	1818	760	
TXB100040S20A45	100	40	M16	43	830	120	2900	740	
TXB100040S20A60	100	40	M16	43	1350	215	4725	1290	
TXB100075S20A45	100	75	M16	43	264	60	1980	1090	
TXB100075S20A60	100	75	M16	43	472	105	3540	1910	
TXB100100S20A45	100	100	M16	43	200	29	2000	522	
TXB100100S20A60	100	100	M16	43	360	76	3600	1368	
TXB150075S20A45	150	75	M16	43	600	88	4500	1144	
TXB150075S20A60	150	75	M16	43	1420	175	10650	2275	
TXB150150S20A45	150	150	M16	43	425	69	8500	1725	
TXB150150S20A60	150	150	M16	43	1050	135	21000	3375	
TXB200100S20A45	200	100	M20	46	800	97	8000	1746	
TXB200100S20A60	200	100	M20	46	1440	187	14400	3366	

CHARACTERISTICS

